

Tm, Ho and Tm/Ho Doped | Fibers

For fiber lasers from 1.9 to 2.2μm

High power laser @ 2 microns needs reliable Thulium doped fiber.

iXblue carries a full range of Thulium and Holmium doped optical fibers for amplifiers and fiber lasers. iXblue's Thulium doped fiber products have been developed for core pumped fiber lasers and amplifiers.

Single clad Holmium doped fiber can be pumped by a Thulium doped fiber laser with direct core pumping.

Double clad Holmium doped fiber is available for high efficiency multi-mode pump coupling.

Key Features


- CW and pulsed fiber lasers @ 2 μm
- High pump and consistent absorption
- Low M²
- Large mode area
- High efficiency
- High Tm₂O₃ concentration

Applications

- 2 μm CW & pulsed lasers
- 2 μm amplifiers

Related Products

- Associated fiber bragg mirrors
- Matching passive fiber

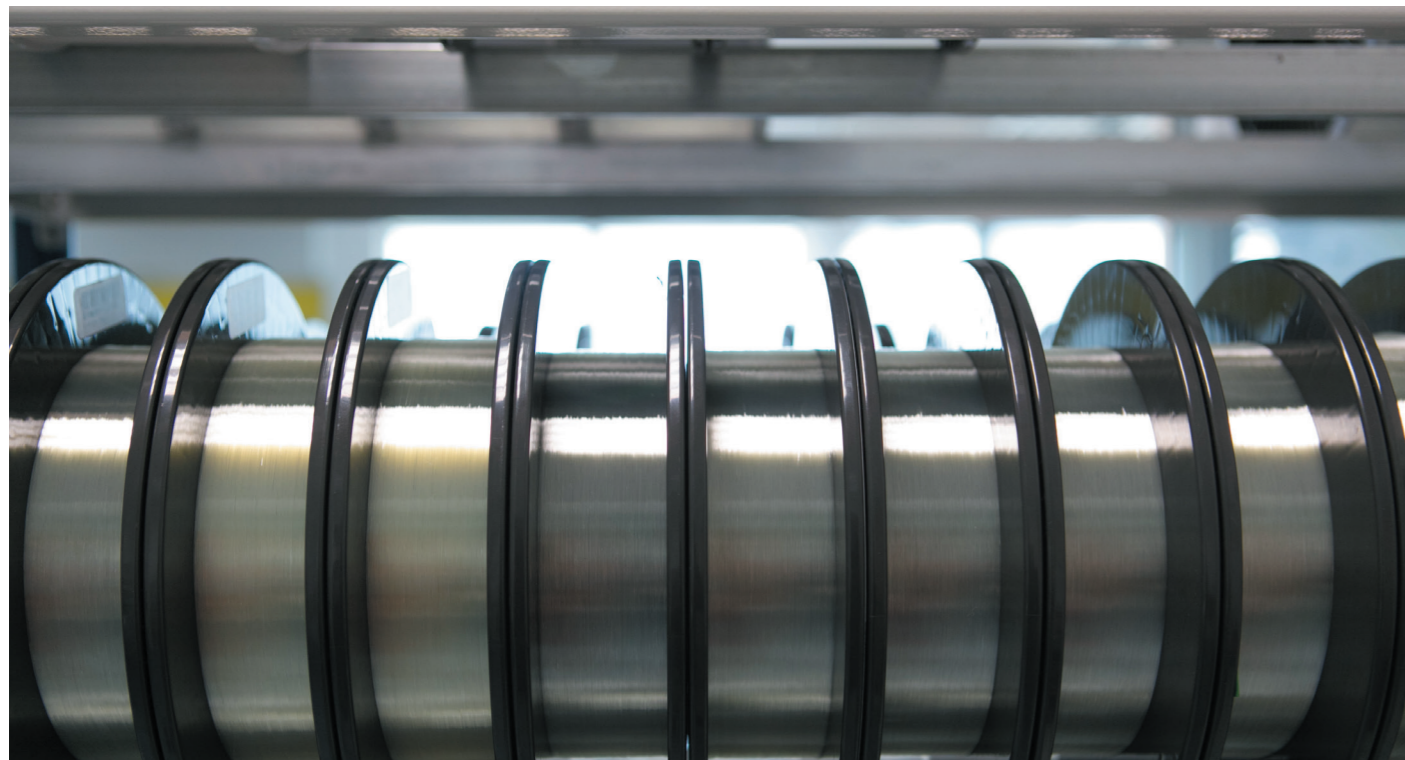

Main Specifications for single clad fibers

Product Name	Core diameter (μm)	Core NA	Core absorption (dB/m)	Core absorption (dB/m)	Cladding diameter (μm)	Coating diameter (μm)
IXF-TDF-4-125	4 +/- 1	0.27	> 150 @ 793 nm *	> 35 @ 1180 nm	125 +/- 2	245 +/- 15
IXF-TDF-5-125	5 +/- 1	0.17	> 300 @ 793 nm*	> 20 @ 1180 nm	125 +/- 2	245 +/- 15
IXF-TDF-5-125-HD	5 +/- 1	0.17	> 300 @ 793 nm*	> 70 @ 1180 nm	125 +/- 2	245 +/- 15
IXF-HDF-8-125	8 +/- 1	0.16	> 2.5 @ 890 nm **	> 15 @ 1150 nm > 45 @ 1950 nm* > 10 @ 2050 nm*	125 +/- 2	245 +/- 15
Polarization Maintaining Fibers:						
IXF-TDF-PM-5-125	4.5 +/- 1	0.25	> 120 @ 793 nm *	> 30 @ 1180 nm	125 +/- 2	245 +/- 15
IXF-HDF-PM-8-125	8 +/- 1	0.16	> 2.5 @ 890 nm **	> 15 @ 1150 nm > 45 @ 1950 nm* > 10 @ 2050 nm*	125 +/- 2	245 +/- 15
IXF-HDF-PM-20-250	20 +/- 2	0.08	> 4 @ 890 nm **	> 24 @ 1150 nm > 72 @ 1950 nm* > 16 @ 2050 nm*	250 +/- 2	340 +/- 20

* calculated from 1180 nm absorption value
** calculated from 1150 nm absorption value

Common specifications

- OH concentration: < 0.01 ppm
- Relative OH absorption @ 1380 nm: < 0.6 dB/km
- Custom specifications on request

Main Specifications for double clad fibers

Product Name	Core diameter (μm)	Core NA	Clad absorption around @789 nm (dB/m)	Clad absorption @1180 nm *(dB/m)	Cladding diameter (μm)	Coating diameter (μm)
IXF-2CF-Tm-O-6-130	6 +/- 0.5	0.22	> 3.3	> 0.6	125 +/- 3	245 +/- 15
IXF-2CF-Tm-O-10-130	10 +/- 1	0.14	> 6.5	> 1.2	125 +/- 3	245 +/- 15
IXF-2CF-Tm-O-12-130	12 +/- 1	0.14	> 5.0	> 1.0	125 +/- 3	245 +/- 15
IXF-2CF-Tm-O-20-250	20 +/- 1	0.09	> 3.3	> 0.6	250 +/- 5	340 +/- 20
IXF-2CF-Tm-O-25-250	25 +/- 1	0.09	> 3.3	> 0.6	250 +/- 5	360 +/- 20
IXF-2CF-TmHo-O-6-130	6 +/- 0.5	0.22	> 3.3	> 0.6	125 +/- 3	245 +/- 15
IXF-2CF-TmHo-O-25-300	25 +/- 1	0.09	> 3.0	> 0.7	300 +/- 10	460 +/- 20
Polarization Maintaining Fibers:						
IXF-2CF-Tm-PM-6-130	6 +/- 0.5	0.22	> 3.3	> 0.6	125 +/- 3	245 +/- 15
IXF-2CF-Tm-PM-10-130	10 +/- 1	0.14	> 6.5	> 1.2	125 +/- 3	245 +/- 15
IXF-2CF-TmHo-PM-6-130	6 +/- 0.5	0.22	> 3.3	> 0.6	125 +/- 3	245 +/- 15
IXF-2CF-TmHo-PM-25-300	25 +/- 1	0.09	> 5.6	> 1.0	300 +/- 10	460 +/- 20

* calculated from 1180 nm absorption value

- Low OH water content : < 0.1 ppm
- Tm/Ho atomic ratio = 10
- Custom specifications on request

Common specifications

- MM background (dB/km): < 50
- Cladding NA: ≥ 0.46
- Cladding shape: octagonal / round (PM) fiber
- Birefringence: > 2.10⁻⁴ typ / Panda type
- Proof test level (kpsi): 100